



International Journal for Innovative Engineering and Management Research

A Peer Reviewed Open Access International Journal

www.ijiemr.org

COPY RIGHT

2018 IJIEMR. Personal use of this material is permitted. Permission from IJIEMR must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works. No Reprint should be done to this paper, all copy right is authenticated to Paper Authors

IJIEMR Transactions, online available on 18th Feb 2018. Link

[:http://www.ijiemr.org/downloads.php?vol=Volume-7&issue=ISSUE-02](http://www.ijiemr.org/downloads.php?vol=Volume-7&issue=ISSUE-02)

Title: **MONITORING AND CONTROLLING OF HOME APPLICATIONS BY USING RASPBERRY PI WITH WIRELESS COMMUNICATION**

Volume 07, Issue 02, Pages: 475–482.

Paper Authors

DEEVI.VALLIBALA, GANESH BABU. PANTANGI

loyola inistute of technology and management, jntuk, Dhulipalla,sattenapalli,AP



USE THIS BARCODE TO ACCESS YOUR ONLINE PAPER

To Secure Your Paper As Per **UGC Guidelines** We Are Providing A Electronic Bar Code

MONITORING AND CONTROLLING OF HOME APPLICATIONS BY USING RASPBERRY PI WITH WIRELESS COMMUNICATION

¹DEEVI.VALLIBALA, ²GANESH BABU. PANTANGI

¹M.Tech Scholar(Embedded systems) Dept of E.C.E, loyola inistute of technology and management,jntuk,Dhulipalla,sattenapalli,AP

²Assistant Professor,Dept of E.C.E, loyola inistute of technology and management, jntuk, Dhulipalla,sattenapalli,AP

¹deevi@gmail.com, ²ganeshbabu.pantangi@gmail.com

Abstract: In this design we can overcome the drawback of existing system. Here we can monitor the above parameters and based on the condition we can also control the parameters. In existing system we are using RF, By using RF it gives less distance,instead of this RF communication we are using zigbee communication for longer distance.The hardware design contains Rasperi-Pi Microcontroller, LCD, Realy, DC fan, Buzzer X-bee transceiver,Voltage sensor , temperature sensor (LM35) , LDR. Here the Rasperipi can continuously taking the data from the sensors and send it to the monitoring section through X-bee transceiver and the data will display on the LCD. If any parameter exceeds the limit then the microcontroller can control the controlling device(the controlling devices are buzzer, DC fan and Load). Zigbee is new wireless technology guided by IEEE 802.15.4 Personal Area Network standard. One of the main advantages of this ZIGBEE communication is that it provides a noise free communication, the amount of noise added in this type of communication is very less compared to the other wireless communications.

Keywords: zigbee, Home Automation, , Raspberry Pi 3.

1. Introduction

Internet of Things allows devices to get associated with the user at any anytime based upon the service. IoT is the revolution in the era of the internet [1]. The smart devices become prominent with the advancement of IoT. The devices are made remotely handy to the user with the association of zigbee. With the proficiency of the internet, all the conventional devices are transformed into smart devices [2]. The significant goal of I is to make the device function intelligently with the facilities of

managing, controlling [3]. IoT enables producing the smart devices into the market in an economical way so that it will be feasible for the users to utilize the services of the smart device. Many domains like industrial automation, healthcare,smart homes, smart energy management are predominantly employed with the zigbee [4]. To manipulate the key functions of the devices and their features accordingly through the internet a computer like systems are used in the IoT. Distinct stages are

governed in the they are the accumulation stage, transmission stage, process management and utilization stage [5]. Smart homes contribute users with facilities like comfort, energy saving, efficiency, improved life quality, advanced security [6] - [7]. in Home automation is one of the predominant development in the technology. By enhancing the technology in the home environment provides users with automation, energy saving. For a Smart home as different sensors and devices are from different companies it may rise to incompatibility issues [8]. So by integrating all the devices via the internet can overcome the incompatibility issues. IPv6 overcomes the drawbacks of IPv4 by providing more number of IP address in IPv6. The central processing element may have a data storage issues. So by providing cloud platform as the interface can overcome this problem. Home automation comprises the primary controlling and managing activities in a household remotely. Home automation is needed because it drives human lives in a simple way [9]. The electrical appliances like washing machine, television, air conditioners, heater, fan, the light will be monitored and controlled remotely with the enhancement of the Internet of Things. The urge for communication in the home automation is to establish connectivity between the home and the outside world. The energy management system is necessary because energy consumption is increasing day by day [10]. So to sustain the consumption of energy this scheme is employed. Even though the specific electrical appliances is not needed, the user

sometimes may forget to OFF the electrical appliance. By the energymangement system, the user can save the electricity and can eliminate the unwanted usage of electricity [11]. The employment of webcam in the home automation system enables security to the home. It facilitates continuous monitoring of home remotely so that user can know if any intruder enters the house.

2. LITERATURE ANALYSIS

The devices in the era of IoT are classified into resource constrained and resource rich devices. The resource rich devices have all the support that a smart device desires. The resource constrained devices lack the support that a smart system desires. The communication between the resource constrained and resource rich devices are not feasible. The technologies like X10, Z-Wave, ZigBee, INSTEON, EnOCEAN are the conventional and prominent technologies in the home automation [12] – [14]. The ZigBee resembles the standards similar to Bluetooth and Wi- Fi standards. It adopts the IEEE 802.15.m ZigBee is not compatible with all the devices. For the device to device communication the ZigBee employs mesh protocol. The Z-Wave is one of the primeval available home automation technologies. It has cross compatibility amidst distinct systems. Every appliance is equipped with a Unique ID for enabling security. Z-Wave functions in US at a frequency of 908.42 MHz. The functional range of Z-Wave is confined to only 30 meters. The Z-Wave extends its functionalities to only 4 devices. The Z-Wave protocol terminates if the communication exceeds over 4 devices. X10

is the earliest home automation technology. X10 can be implemented with both the wired and Wireless Radio communication. Only one command is transmitted at a time. For multiple messages transmission it may raise decoding issues. The INSTEON functions on wireless systems and it employs switches to work with Radio frequency. The INSTEON works for power line devices at a data transmission rate of 1131.65 kHz and for wireless devices the data transmission rate is 90 MHz. EnOcean is the most modern automation technology it desires at working at zero energy consumption. It has the ability to function wirelessly. The electrical appliances users used to implement Bluetooth, Infrared technologies. These technologies require a specific range to function. So zigbee eliminates the operating range obstacles that are shown in Bluetooth and Infrared technologies and hence provide a better system. Centralized controlling of all the smart devices must be employed with the help of computer-like processor. With the enhancement made in communication, Energy consumption is one of the most challenging tasks for the smart home. About 27 % of the energy available is consumed by home appliances and consumer electronic products [15]. In this contemporary world, electricity is the essential need for every individual. Day by day the energy resources are decreasing, but the usage of electricity is widening. Sometimes users forget to turn OFF the electrical appliance which leads to consumption of more energy which is not required by the device. To collect the data from the appliances smart energy meters is

employed [16]. In energy management approach, the household electrical loads are grouped into the constant and oneshot load [17] - [18]. The constant load is not turned OFF and is constantly active. The one-shot load is initiated during a precise span of time. The Power consumption in a number of smart devices is significantly based on two aspects that are standby power and normal operational power [19]. In the approach of standby power, the electrical appliances are held in static functioning. In the approach of normal operational power, the electrical appliances are held in continuous dynamic functioning. The energy management in the smart devices is accomplished by programming the appliances with the Raspberry Pi 3 with the interface of IoT [20]. For enhancing security scheme in the home environments camera can be added for providing better security [21]. The primary goal is to build understanding about energy consumption and adequate usage of electrical appliances in the home for energy saving.

3. HARDWARE USED IN SYSTEM IMPLEMENTATION

The Figure 1 represents the functional block diagram of the Implemented system and a detailed description of the modules are discussed below. In the Implemented System, the electrical appliance 1 and electrical appliance 2 are interfaced to two energy meters. Two Relays are interfaced between two energy meters and one Raspberry Pi 3 so as to do voltage conversions. The two LM358 IC is employed to count the pulses from the two energy meters and convey the power

consumption information to the Raspberry Pi 3. The 16 X 2 LCD Display displays the parameters measured. The webcam is interfaced with the Raspberry Pi 3 for the purpose of security. It takes the snapshot of the intruder and sends it to the user.

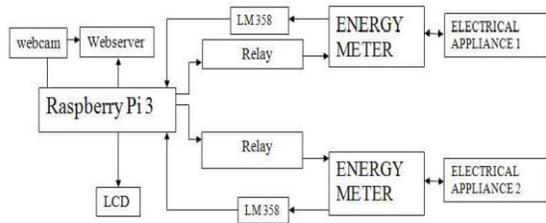


Figure 1: Block diagram of the implemented system

Relay: Relay shown in Figure 3 are used to split and set up connection so as to pass the current. Its significant application is to act like a switch. Relays are used in controlling and monitoring applications. The electrical appliances operate on 230 V, but the Raspberry Pi 3 works on 5 V. So to overcome this problem relays are used.



Figure 3: Relay module

LM 358: LM 358 shown in Figure 4 is a low cost, low power and dual channel operational amplifier. It is an 8 pin DIP and operates at a frequency of 1 MHz. Its main application is intended for level detections. It can operate from single power supply and distinct range of voltages 3-32 V. It also acts like a comparator. It compares the voltage applied at the input pins and produces the output. It eliminates separated power supply for running of each comparator

for a distinct range of power supplies.

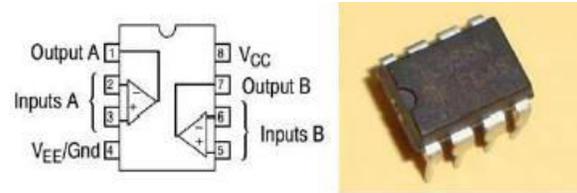


Figure 4: LM 358 pin configuration

Raspberry Pi 3: The Raspberry Pi 3 shown in Figure 5 is a low cost, powerful processor. It facilitates on the operating voltage of 5 V. It can facilitate the user with all the features that are provided in the personal computer. The Raspberry Pi 3 acts as a central server and also as a gateway for protocol conversion that is from wired to wireless. The Raspberry Pi3 is programmed using Python programming language. All the information from electrical appliances is transferred to the Raspberry Pi with the aid of intermediate circuitry to achieve high computations and efficient data communication.



Figure 5: Raspberry Pi 3

16X2 LCD Display: 16X2 LCD display shown in Figure 6 is used to display the messages. The 16X2 LCD has a 2 line 16 character display. It will display the measurements that are ongoing in the system. The LCD display is advantageous over the seven segments and multiple segment LED's. 16X2 LCD is easily

programmable and can be easily interfaced with any type of computing device. It has a set of commands to perform certain operations.



Figure 6: LCD Display

4. SYSTEM IMPLEMENTATION METHODOLOGY

The Figure 8 represents the experimental setup of the system and the working principle of the system is explained below. The Home Automation system developed is employed with energy management and security system. In this system, the implementation is done to control and monitor two electrical appliances. The devices used in this system are two electrical appliances, two energy meter, two relay integrated with Optocouplers, LM 358 IC, Webcam, Raspberry Pi 3.



The Raspberry Pi 3 provides a supply of 5 V but the electrical appliances in general operates on 230 V. So relays are employed in this system for voltage conversions and also to remotely ON and OFF the electrical appliance. The energy consumed by the two

electrical appliances is governed by two energy meters. The energy consumed by two electrical appliances is displayed on the energy meters. The energy meters are given a threshold value of 200 Watts for the electrical appliances to function. If the user forgets to OFF, the electrical appliance, the appliance after consuming up to a threshold value of 200 Watts the appliance will be automatically OFF and hence the energy management scheme is employed. The LM 358 IC eliminates the electrical noise and acts as a voltage controlled oscillator. The LM 358 IC transmits the power readings taken by the energy meters to the Raspberry Pi 3. The Raspberry Pi 3 acts as central server and also a gateway because it employs in protocol conversion. The Raspberry Pi 3 uploads the meter readings into the database of the web server. The webcam in this system is implemented to enhance the security by monitoring the devices remotely through the web page. So that the user can take recommended action. The energy consumed by each electrical appliance is monitored and it also displays the user whether the appliance is in ON state or OFF state to the user in the web page. If the user doesn't want to operate the electrical appliance in ON state, the user can remotely swap the state with the help of interface provided on the web page and desired operation is performed. All the controlling and monitoring information is manipulated with the Raspberry Pi 3. The Raspberry Pi 3 is programmed using Python language. The implemented system is low cost, secure and energy consumption of the

appliances is also reduced. It can provide the information in real time.

5. RESULTS

The developed system facilitates the user to monitor remotely the electrical appliance consumption from the energy meter with the aid of the web page. In the web server the data are arranged in the form of tables and provides with as the user interface in the web page. In the Figure 9 units 1 and units 2 shows the status of energy consumed by both electrical appliance.

In the Figure 9 the L1 and L2 represent whether the device is in either ON state or OFF state and it also represents the time details.



Figure 9: The Results are displayed on the Board

The webcam integrated in the home environment used to take the snapshot of the intruder person as shown in Figure 12. The user receives the intruder picture to the web page. So with this webcam facility the buser will secure the home.

6. CONCLUSION

The implemented system resembles a key idea to control and monitor appliances. The energy management scheme is also employed in this project and can also be extended to real time applications. Security scheme is also enhanced in this project with

the help of a web cam. The developed concept is very efficient, low cost, and can be easily afforded by even common people. With slight modifications this project can be extended to monitor, control, manage energy consumption to the number of electrical appliances and also provide security.

Acknowledgement

Authors are greatly thankful to the KL University authorities for providing necessary infrastructure facilities to carry out this project work.

REFERENCES

- [1] Takeshi Yashiro, Shinsuke Kobayashi, Noboru Koshizuka and Ken Sakamura, "An Internet of Things (IoT) Architecture for Embedded Appliances", Electrical and Control Engineering (ICECE), 2011 International Conference, Yichang, IEEE, 2011, pp. 2578-2581.
- [2] Pavithra.D, Ranjith Balakrishnan "IoT based Monitoring and Control System for Home Automation", 2015 Global Conference on Communication Technologies, IEEE, pp. 169-173.
- [3] Ivan Ganchev, Zhanlin Ji, Mairtin O Droma "A Generic IoT Architecture for Smart Cities", ISSC 2014 / CIICT 2014, Limerick, June 2627.
- [4] Moser K., Harder J., and Koo S. G. M., "Internet of things in home automation and energy efficient smart home technologies," IEEE International Conference on Systems, Man and Cybernetics (SMC), (SMC-2014), San Diego, CA, 5-8 Oct 2014, pp. 1260–1265.
- [5] Z. Fu, J. Shu, X. Sun, N. Linge, "Smart cloud search services: Verifiable keyword-based semantic search over encrypted cloud

data”, IEEE Trans. Consumer Electron., Vol. 60, No. 4, pp. 762-770, Nov. 2014.

[6] M. Erol-Kantarci, H. T. Mouftah, “Wireless Sensor Networks for Cost-Efficient Residential Energy Management in the Smart Grid”, IEEE Trans. Smart Grid, Vol. 2, No. 2, pp. 314-25, June 2011.

[7] H. Y. Tung, K. F. Tsang, H. C. Tung, K. T. Chui, H. R. Chi, “The design of dual radio ZigBee homecare gateway for remote patient monitoring”, IEEE Trans. Consumer Electron., Vol. 59, No. 4, pp. 756-764, Nov. 2013.

[8] Alkar, A.Z.; Buhur, U., An Internet based wireless home automation system for multifunctional devices, IEEE transactions on Consumer Electronics, vol.51, no.4, pp.1169,1174, Nov. 2005.

[9] R.Piyare, M.Tazil” Bluetooth Based Home Automation System Using Cell Phone”, 2011 IEEE 15th International Symposium on Consumer Electronics.

[10] Fawzi MA, Ramzy SA, Ahmed JA. Smart home energy management design based on power line communication 2012. Chen MT, Lin CM. Development of a smart home energy saving system combining multiple smart devices. IEEE International Conference on Consumer Electronics-Taiwan (ICCE-TW); 2016. p. 1–2.

[11] Amjad AM, Hassan M, Ashkan RK. Optimal smart home energy management considering energy saving and a comfortable lifestyle. IEEE Transactions on Smart Grid. 2015; 6:324–32.

[12] Tae-Seop, Choi, Kyung-Rok, Ko, Seong-Chan, Park and Young-Sik Jang, “Analysis of energy savings using smart metering system and IHD (inhome display),” Asia

Pacific 2009 IEEE Transmission & Distribution Conference & Exposition, pp. 1-4, 26-30 Oct 2009.

[13] T. Tariq, “Smart energy management in a smart environment using a mobile device,” Global Summit on Computer & Information Technology, pp. 1-5, 14-16 June 2014.

[14] M. Erol-Kantarci, H. T. Mouftah, “Wireless Sensor Networks for Cost-Efficient Residential Energy Management in the Smart Grid”, IEEE Trans. Smart Grid, Vol. 2, No. 2, pp. 314-25, June 2011.

[15] S. Kong, Y. Kim, R. Ko, S. K. Joo, “Home appliance load disaggregation using cepstrum-smoothing-based method”, IEEE Trans. Consumer Electron., Vol. 61, No. 1, pp. 24-30, Feb. 2015.

[16] J. Han, C. S. Choi, W. K. Park, I. Lee, S. H. Kim, “Smart home energy management system including renewable energy based on ZigBee and PLC”, IEEE Trans. Consumer Electron., Vol. 60, No. 2, pp. 198-202, May 2014.

[17] Ashok Khanna, Prateep Misra, “White Paper Life Sciences, The Internet of Things for Medical Devices -Prospects, Challenges and the Way Forward, Tata Consultancy Services”, July 1, 2014.

[18] Haidong Wang; Saboune, J.; El Saddik, A., ”Control your smart home with an autonomously mobile smartphone,” IEEE International Conference on Multimedia and Expo Workshops (ICMEW), vol., no., pp.1,6, 15-19 July 2013.

[19] D.-M. Han and J.-H. Lim, “Design and implementation of smart home energy management systems based on zigbee,” IEEE Trans. Consum. Electron., Vol. 56, No. 3, pp. 1417–1425, Aug. 2010.

[20] S. R. Das, S. Chita, N. Peterson, B. A. Shirazi, M. Bhadkamkar, "Home automation and security for mobile devices", Pervasive Computing and Communications Workshops (PERCOM Workshops) 2011 IEEE International Conference on, pp. 141-146, 2011.

STUDENT DETAILS:



DEEVI.VALLIBALA

14A41D5505 embedded systems, ECE, M.tech,loyola inistute of technology and management

jntuk,Dhulipalla,sattenapalli,AP

GUIDE DETAILS



GANESH BABU. PANTANGI

currently working in loyola inistute of technology and management,Dhulipalla sattenapalli as a asst .professor in the department of electronics& communication enginnering