



COPY RIGHT

2017 IJIEMR. Personal use of this material is permitted. Permission from IJIEMR must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works. No Reprint should be done to this paper, all copy right is authenticated to Paper Authors

IJIEMR Transactions, online available on 25th June 2017. Link :

<http://www.ijiemr.org/downloads.php?vol=Volume-6&issue=ISSUE-4>

Title: Simulation And Performance Of An Adjustable-Speed Pfc Bridgeless Buck-Boost Converter Fed Bldc Motor Drive With Fuzzy Logic Controller.

Volume 06, Issue 04, Page No: 1129 – 1238.

Paper Authors

***K.SAIRAM, A.ARUN KUMAR.**

* Deot of EEE, Velaga Nageswararao Engineering College, JNTUK, Guntur (Dt).



USE THIS BARCODE TO ACCESS YOUR ONLINE PAPER

To Secure Your Paper As Per **UGC Guidelines** We Are Providing A Electronic Bar Code

SIMULATION AND PERFORMANCE OF AN ADJUSTABLE-SPEED PFC BRIDGELESS BUCK-BOOST CONVERTER FED BLDC MOTOR DRIVE WITH FUZZY LOGIC CONTROLLER

*K.SAIRAM, **A.ARUN KUMAR

*PG Scholar, Deot of EEE, Velaga Nageswararao Engineering College, JNTUK; Guntur (Dt); Andhra pradesh, India.

**Assistant Professor, Deot of EEE, Velaga Nageswararao Engineering College, JNTUK; Guntur (Dt); Andhra pradesh, India.

sairamph225@gmail.com chinnualladi@gmail.com

ABSTRACT –

An approach of speed control of the BLDC motor by controlling the dc link voltage of the voltage source inverter (VSI) is used with a single voltage sensor. This paper presents a power factor corrected (PFC) bridgeless (BL) buck–boost converter-fed brushless direct current (BLDC) motor drive with fuzzy logic controller as a cost-effective solution for low-power applications. This facilitates the operation of VSI at fundamental frequency switching by using the electronic commutation of the BLDC motor which offers reduced switching losses. A BL configuration of the buck–boost converter is proposed which offers the elimination of the diode bridge rectifier, thus reducing the conduction losses associated with it. A PFC BL buck–boost converter is designed to operate in discontinuous inductor current mode (DICM) to provide an inherent PFC at ac mains. The obtained power quality indices are within the acceptable limits of international power quality standards such as the IEC 61000-3-2. The performance of the proposed drive is simulated in MATLAB/Simulink.

Keywords: Bridgeless (BL) Buck–Boost Converter, Brushless Direct Current (BLDC) Motor, Discontinuous Inductor Current Mode (DICM), Power Factor Corrected (PFC), Power Quality, fuzzy logic controller.

I. INTRODUCTION

Efficiency and cost are the major concerns in the development of low-power motor drives targeting household applications such as fans, water pumps, blowers, mixers, etc. [1], [2]. The use of the brushless direct current (BLDC) motor in these applications is becoming very common due to features of high efficiency, high flux density per unit volume, low maintenance requirements, and low electromagnetic-interference problems [1]. These BLDC motors are not limited to household applications, but these are suitable for other applications such as medical equipment, transportation, HVAC, motion control, and many industrial tools [2]–[4]. A

BLDC motor has three phase windings on the stator and permanent magnets on the rotor [5], [6]. The BLDC motor is also known as an electronically commutated motor because an electronic commutation based on rotor position is used rather than a mechanical commutation which has disadvantages like sparking and wear and tear of brushes and commutator assembly [5], [6].

Power quality problems have become important issues to be considered due to the recommended limits of harmonics in supply current by various international power quality standards such as the International Electrotechnical Commission (IEC) 61000-3-2 [7]. For class-A equipment (< 600 W, 16 A per phase) which includes household

equipment, IEC 61000-3-2 restricts the harmonic current of different order such that the total harmonic distortion (THD) of the supply current should be below 19% [7]. A BLDC motor when fed by a diode bridge rectifier (DBR) with a high value of dc link capacitor draws peaky current which can lead to a THD of supply current of the order of 65% and power factor as low as 0.8 [8]. Hence, a DBR followed by a power factor corrected (PFC) converter is utilized for improving the power quality at ac mains. Many topologies of the single-stage PFC converter are reported in the literature which has gained importance because of high efficiency as compared to two-stage PFC converters due to low component count and a single switch for dc link voltage control and PFC operation [9], [10]. The choice of mode of operation of a PFC converter is a critical issue because it directly affects the cost and rating of the components used in the PFC converter.

The continuous conduction mode (CCM) and discontinuous conduction mode (DCM) are the two modes of operation in which a PFC converter is designed to operate [9], [10]. In CCM, the current in the inductor or the voltage across the intermediate capacitor remains continuous, but it requires the sensing of two voltages (dc link voltage and supply voltage) and input side current for PFC operation, which is not cost-effective. On the other hand, DCM requires a single voltage sensor for dc link voltage control, and inherent PFC is achieved at the ac mains, but at the cost of higher stresses on the PFC converter switch; hence, DCM is preferred for low-power applications [9], [10]. The conventional PFC scheme of the BLDC motor drive utilizes a pulse-width-modulated voltage source inverter (PWM-VSI) for speed control with a constant dc link voltage. This offers higher switching losses in VSI as the switching losses increase as a square function of switching frequency. As the speed of the BLDC motor is directly proportional to the applied dc link voltage, hence, the speed

control is achieved by the variable dc link voltage of VSI. This allows the fundamental frequency switching of VSI (i.e., electronic commutation) and offers reduced switching losses. This paper presents a BL buck–boost converter fed BLDC motor drive with variable dc link voltage of VSI for improved power quality at ac mains with reduced components and superior control.

II. CONVENTIONAL SYSTEM

The proposed BL buck–boost converter based VSI fed BLDC motor drive is shown in fig.4. The parameters of the BL buck–boost converter are made such that it operates in discontinuous inductor current mode (DICM) to attain an inherent power factor correction at ac mains. The speed control of BLDC motor is accomplished by the dc link voltage control of VSI using a BL buck–boost converter. This reduces the switching losses in VSI because of the low frequency operation of VSI for the electronic commutation of the BLDC motor.

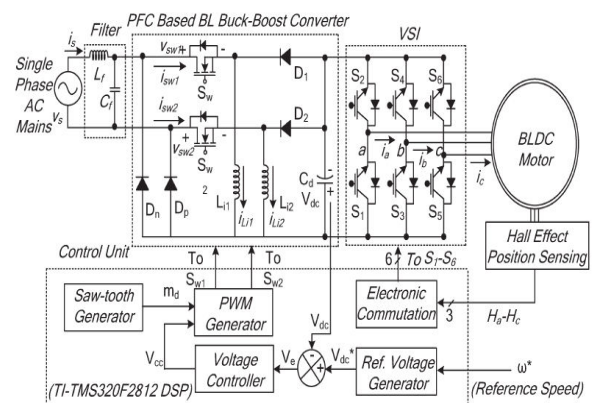


Fig.1. Block diagram of PFC based BL Buck-Boost converter fed BLDC motor drive

In the proposed arrangement of bridgeless buck help converter has the base number of parts and slightest number of conduction gadgets amid every half cycle of supply voltage which administers the decision of BL buck boost converter for this application. The operation of the PFC bridgeless buck-help converter is ordered

into two parts which incorporate the operation amid the positive and negative half cycles of supply voltage and amid the complete exchanging cycle.

A. Operation during Positive and Negative Half Cycle of Supply Voltage

In this mode converter switches S_{w1} and S_{w2} are work in positive and negative half cycle of supply voltage individually. A mid positive half cycle switch S_{w1} , inductor L_{i1} and diodes D_1 and D_2 are worked to exchange vitality to DC join capacitor C_d . Thus in negative half cycle of supply voltage switches S_{w2} , inductor L_{i2} and diode D_2 In Irregular Inductor Current Mode(DICM) operation of converter the present in the inductor L_i gets to be irregular for certain term in an exchanging period.

B. Operation during Complete Switching Cycle

In this exchanging cycle there are three methods of operation.

Mode I: In this mode, switch S_{w1} conducts for charging the inductor L_{i1} , thus the inductor current $i_{L_{i1}}$ increments in this mode. Diode D_1 finishes the information side and the DC join capacitor C_d is released by VSI nourished BLDC engine

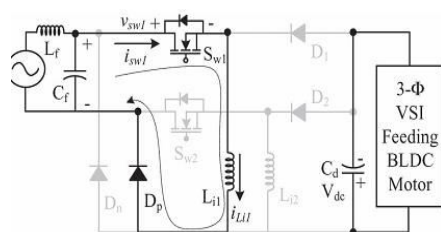


Fig.2. mode 1 operation

Mode II: In this method of operation switch S_{w1} is killed furthermore, the put away vitality from the inductor L_{i1} is exchanged to DC join capacitor C_d till the inductor is completely released

furthermore, current in the inductor is completely lessened to zero.

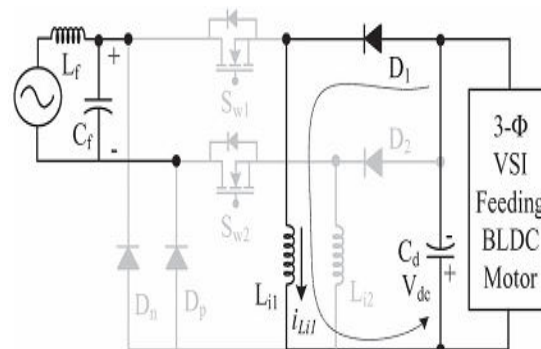


Fig.3. mode 2 operation

Mode III: In this method of operation inductor L_{i1} work in intermittent conduction mode and diodes and switch are in off condition. As of now DC jo in capacitor C_d begins releasing. This operation can be proceeding up to switch S_{w1} is turned on once more.

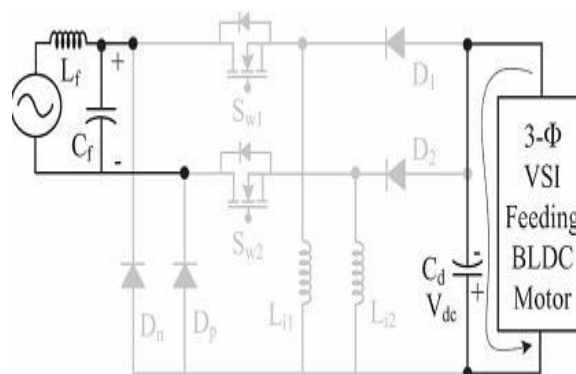


Fig.4. mode 3 operation

Similarly, for the negative half cycle of the supply voltage, switch S_{w2} , inductor L_{i2} , and diodes D_n and D_2 operate for voltage control and PFC operation.

A PFC BL buck–boost converter is designed to operate in DICM such that the current in inductors L_{i1} and L_{i2} becomes discontinuous in a switching period. For a BLDC of power rating 251 W a power converter of 350 W (P_o) is designed. For a supply voltage with an rms value of 220 V, the average voltage appearing at the input side is given as

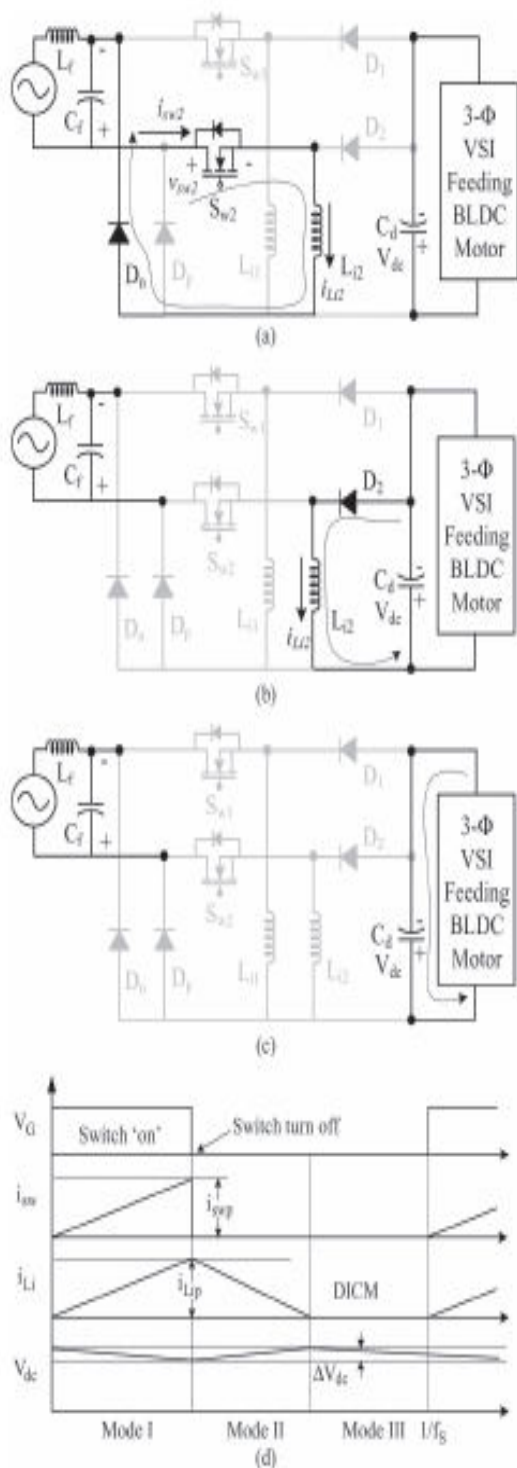


Fig.5 Operation of the proposed converter in different modes (a)–(c) for a negative half cycles of supply voltage and (d) the associated waveforms. (a)Mode I. (b) Mode II. (c) Mode III. (d) Waveforms during complete switching cycle.

IV. CONTROL OF PFC BL BUCK-BOOST CONVERTER-FED BLDC MOTOR DRIVE

A. Control of Front-End PFC Converter: Voltage Follower Approach

The control of the front-end PFC converter generates the PWM pulses for the PFC converter switches (S_{w1} and S_{w2}) for dc link voltage control with PFC operation at ac mains. A single voltage control loop (voltage follower approach) is utilized for the PFC BL buck–boost converter operating in DICM. A reference dc link voltage (V_{dc}) is generated as

$$V_{dc}^* = k_v \omega^*$$

Where k_v and ω^* are the motor's voltage constant and the reference speed, respectively. The voltage error signal (V_e) is generated by comparing the reference dc link voltage (V_{dc}) with the sensed dc link voltage (V_{dc}) as

$$V_e(k) = V_{dc}^*(k) - V_{dc}(k)$$

where k represents the k th sampling instant.

This error voltage signal (V_e) is given to the voltage proportional–integral (PI) controller to generate a controlled output voltage (V_{cc}) as

$$V_{cc}(k) = V_{cc}(k-1) + k_p \{V_e(k) - V_e(k-1)\} + k_i V_e(k)$$

Where k_p and k_i are the proportional and integral gains of the voltage PI controller.

Finally, the output of the voltage controller is compared with a high frequency saw tooth signal (m_d) to generate the PWM pulses as

$$\begin{aligned} \text{For } v_s > 0; & \quad \begin{cases} \text{if } m_d < V_{cc} \text{ then } S_{w1} = \text{'ON'} \\ \text{if } m_d \geq V_{cc} \text{ then } S_{w1} = \text{'OFF'} \end{cases} \\ \text{For } v_s < 0; & \quad \begin{cases} \text{if } m_d < V_{cc} \text{ then } S_{w2} = \text{'ON'} \\ \text{if } m_d \geq V_{cc} \text{ then } S_{w2} = \text{'OFF'} \end{cases} \end{aligned}$$

Where $Sw1$ and $Sw2$ represent the switching signals to the switches of the PFC converter.

B. Control of BLDC Motor: Electronic Commutation

An electronic commutation of the BLDC motor includes the proper switching of VSI in such a way that a symmetrical

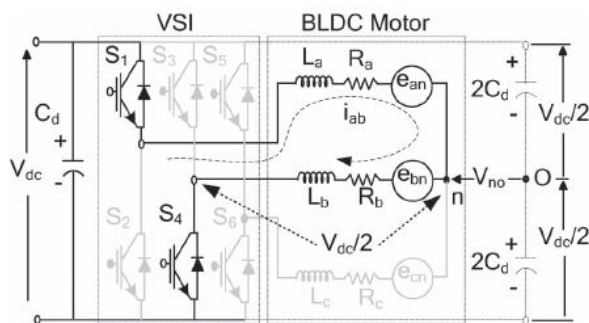


Fig.6 Operation of a VSI-fed BLDC motor when switches $S1$ and $S4$ are conducting.

TABLE I
SWITCHING STATES FOR ACHIEVING ELECTRONIC COMMUTATION OF BLDC MOTOR BASED ON HALL-EFFECT POSITION SIGNALS

θ ($^\circ$)	Hall Signals			Switching States					
	H_a	H_b	H_c	S_1	S_2	S_3	S_4	S_5	S_6
NA	0	0	0	0	0	0	0	0	0
0-60	0	0	1	1	0	0	0	0	1
60-120	0	1	0	0	1	1	0	0	0
120-180	0	1	1	0	0	1	0	0	1
180-240	1	0	0	0	0	0	1	1	0
240-300	1	0	1	1	0	0	1	0	0
300-360	1	1	0	0	1	0	0	1	0
NA	1	1	1	0	0	0	0	0	0

dc current is drawn from the dc link capacitor for 120° and placed symmetrically at the center of each phase. A Hall-effect position sensor is used to sense the rotor position on a span of 60° , which is required for the electronic commutation of the BLDC motor. The conduction states of two switches ($S1$ and $S4$) are shown in Fig. 5. A line current i_{ab} is drawn from the dc link capacitor whose magnitude depends on the applied dc link voltage (V_{dc}), back electromotive forces (EMFs) (e_a and e_b), resistances (R_a and

R_b), and self-inductance and mutual inductance (L_a , L_b , and M) of the stator windings. Table II shows the different switching states of the VSI feeding a BLDC motor based on the Hall-effect position signals ($H_a - H_c$). A

brief modeling of the BLDC motor is given in the Appendix.

IV. PROPOSED FUZZY LOGIC CONTROLLER

The control framework is in light of fuzzy logic. FL controller is an one sort non straight controller and programmed. This kind of the control drawing closer the human thinking that makes the utilization of the acknowledgement, vulnerability, imprecision and fluffiness in the choice making procedure, figures out how to offer an exceptionally tasteful execution, without the need of a definite numerical model of the framework, just by fusing the specialists' learning into the fluffy. Fig 11 demonstrates the FL controller piece outline. This fluffy rationale control framework is in view of the MAMDHANI fluffy model. This framework comprises of four principle parts. To begin with, by utilizing the info enrollment capacities, inputs are Fuzzified then in view of standard bases and the inferencing framework, yields are delivered lastly the fluffy yields are Defuzzified and they are connected to the principle control framework.

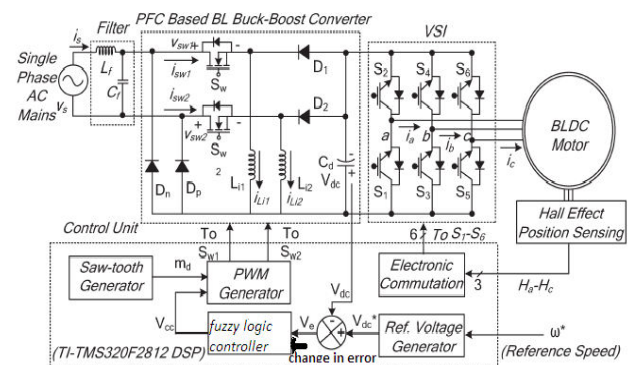


Fig. 7 circuit diagram of PFC based BL Buck-Boost converter fed BLDC motor drive with fuzzy controller.

Error of inputs from their references and error deviations in any time interval are chosen as MATLAB. The output of fuzzy controller is the value that should be added to the prior output to produce new reference output.

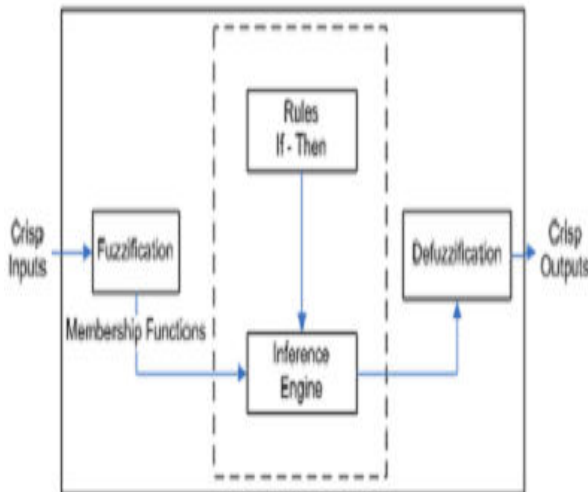


Fig.8. Block Diagram of fuzzy logic controller

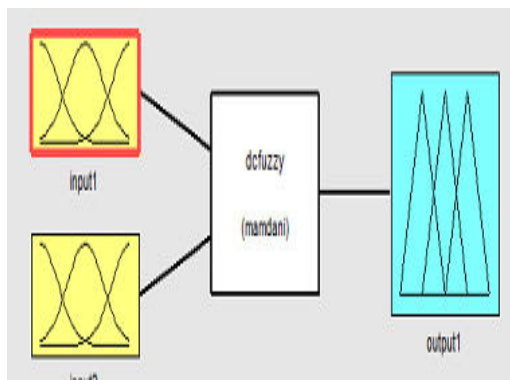


Fig 9. selection of input and output variables

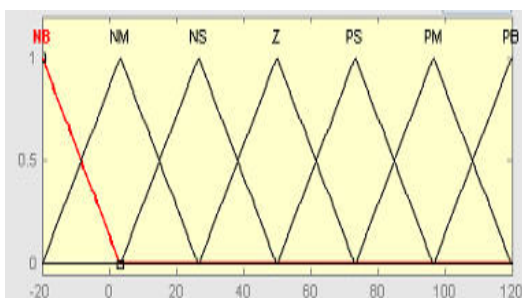


Fig 10. Input1 membership function

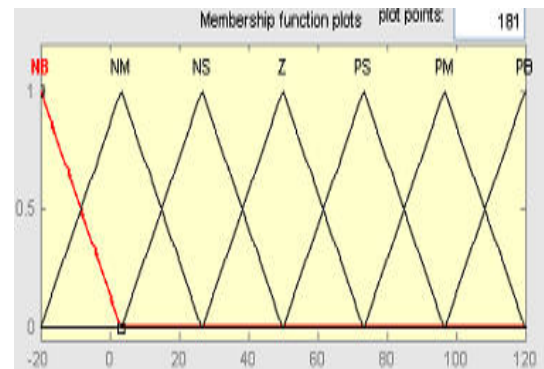


Fig.11 Input 2 membership function

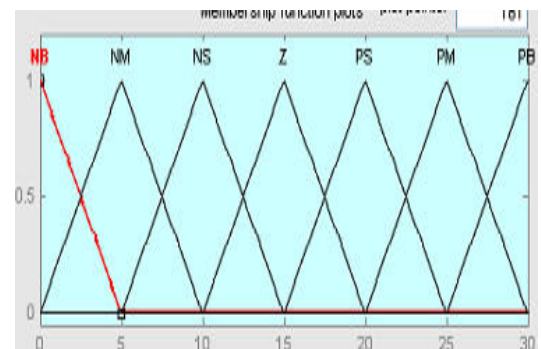


Fig.12. Output membership function

V. MATLAB/SIMULINK RESULTS

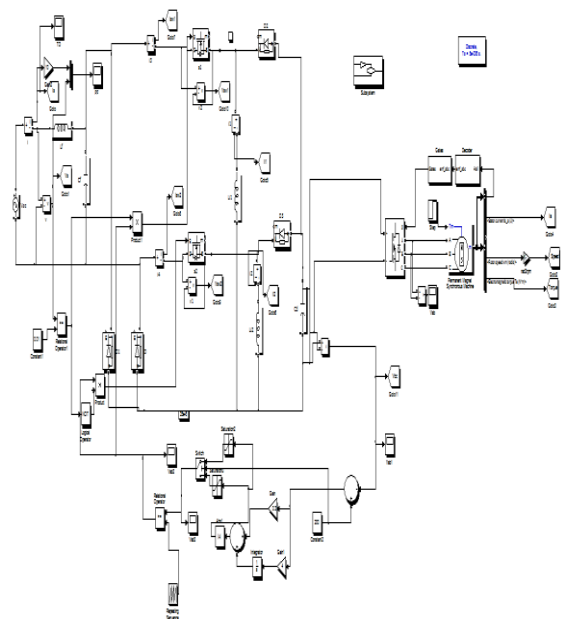


Fig.13. Simulink circuit for BLDC drive with bridgeless PFC based buck boost converter

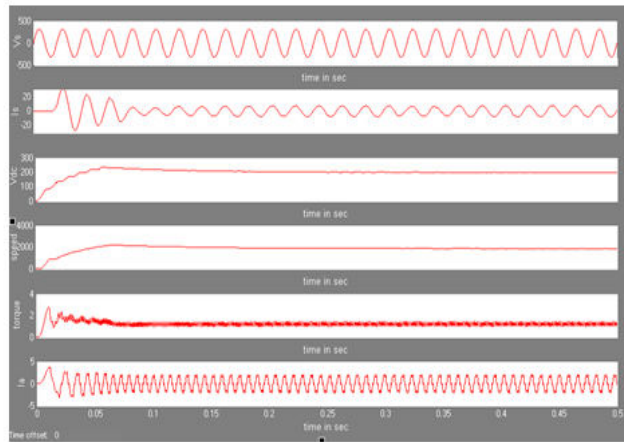


Fig.14.Simulation results for source voltage, current, dc link voltage, and speed, torque, stator current of BLDC motor under steady state performance

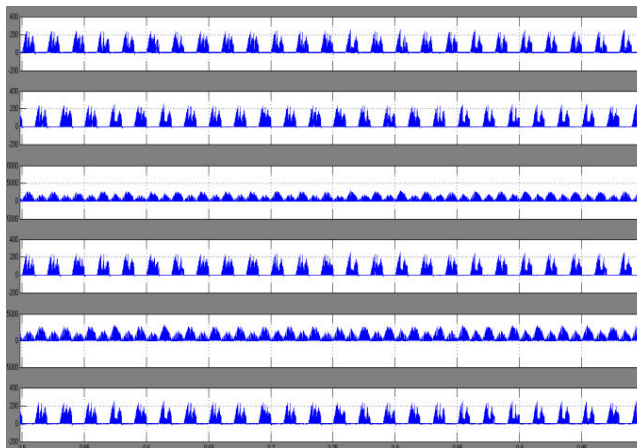


Fig.15.Simulation results for i_{L1} , i_{L2} , V_{sw1} , i_{sw1} , V_{sw2} , i_{sw2} of PFC converter under steady state performance

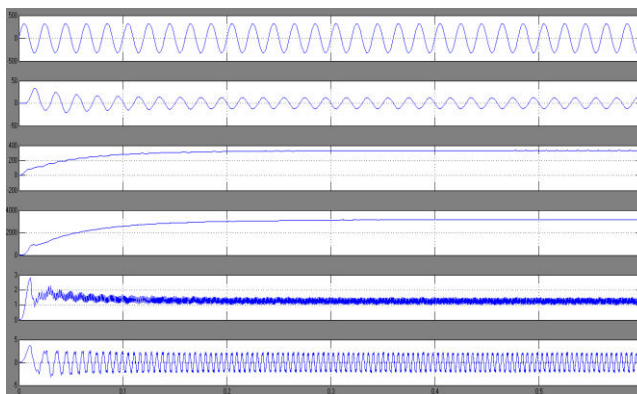


Fig.16.Simulation result of dynamic performance of system during starting

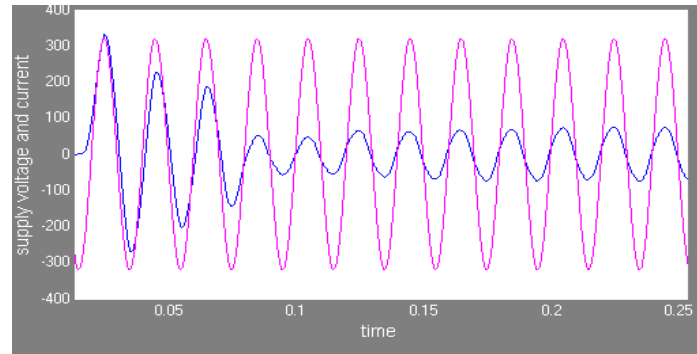


Fig.17.shows the simulation of input power factor.

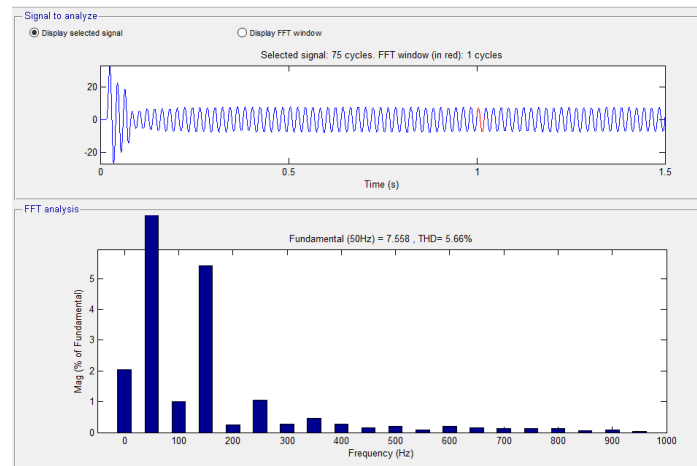


Fig.18: harmonic spectra in supply current by using pfc based bl buck-boost converter fed bldc motor

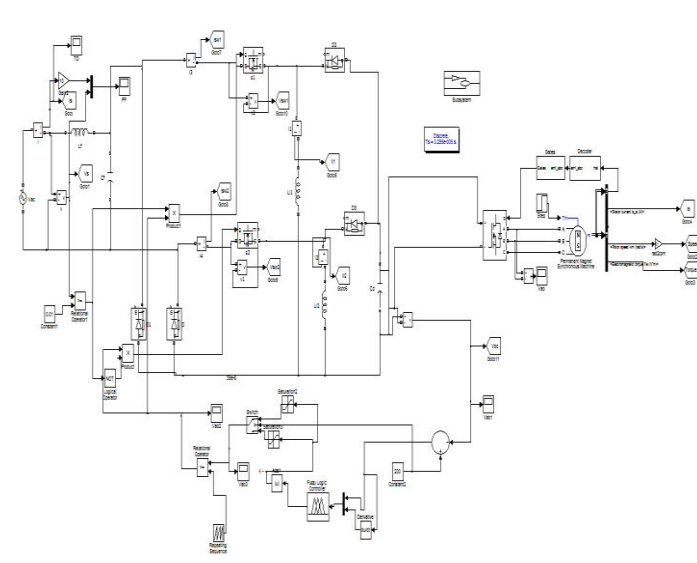


Fig.19.Simulink circuit for proposed system by using fuzzy controller

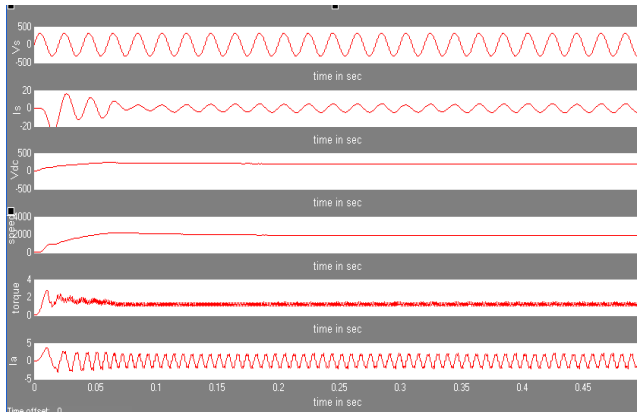


Fig.20: .Simulation results for source voltage, current, dc link voltage, and speed, torque, when ($w^*=2000\text{rpm}$) stator current using fuzzy logic controller under steady state performance.

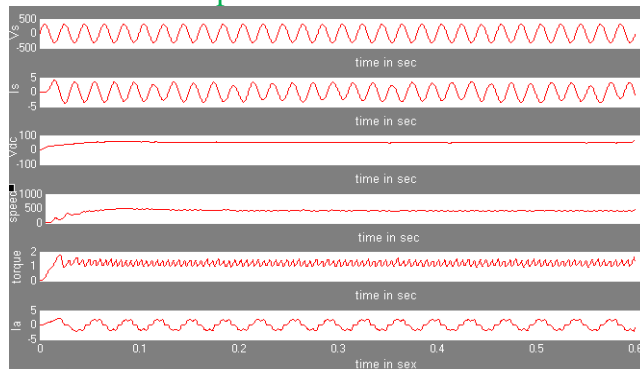


Fig.21 Simulation results for source voltage, current, dc link voltage, and speed, torque, when ($w^*=500\text{rpm}$) stator current using fuzzy logic controller.

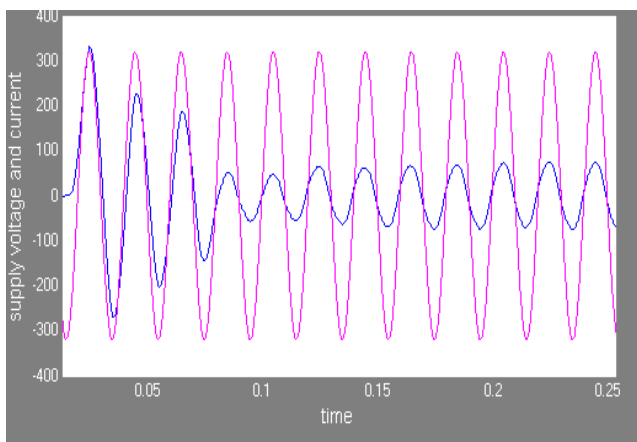


Fig.22.shows the Simulation result of input power factor

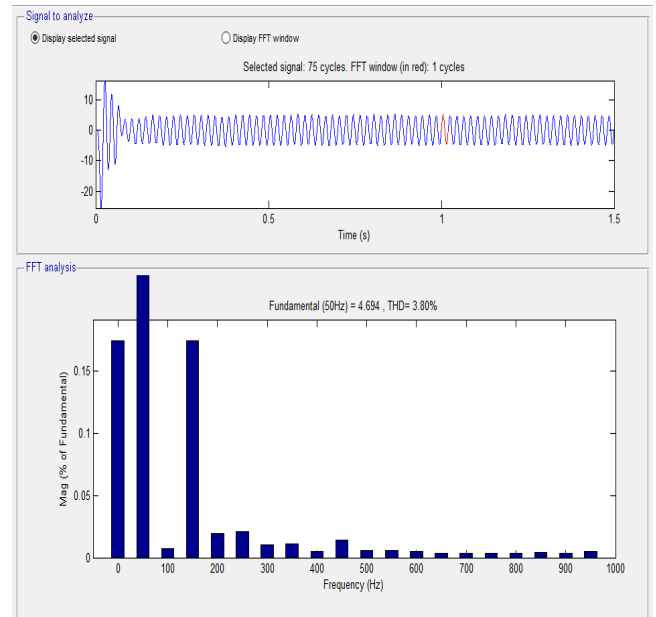


Fig.23: harmonic spectra in supply current using PFC BL-buck-boost converter and fuzzy logic controller.

VI. CONCLUSION

A PFC based BL buck–boost converter-based VSI-fed BLDC motor drive using fuzzy logic controller has been proposed targeting low-power applications. A new method of speed control has been utilized by controlling the voltage at dc bus and operating the VSI at fundamental frequency for the electronic commutation of the BLDC motor for reducing the switching losses in VSI. The front-end BL buck–boost converter has been operated in DICM for achieving an inherent power factor correction at ac mains. A satisfactory performance has been achieved for speed control and supply voltage variation with power quality indices within the acceptable limits of IEC 61000-3-2. Moreover, voltage and current stresses on the PFC switch have been evaluated for determining the practical application of the proposed scheme. By comparing the both the controllers with their THD's observe that using fuzzy logic controller THD is reduced from 5.66% to 3.80% and power factor is maintained near to unity.

REFERENCES:

- [1] G. Sakthival, T.S. Anandhi and S.P. Natarjan. 2010. Real time implementation of DSP based Fuzzy logic controller for Speed control of BLDC motor. International Journal of Computer Applications (0975 - 8887). 10(8).
- [2] K. Naga Sujatha, K. Vaisakh and Anand. G. 2010. Artificial Intelligence based speed control of brushless DC motor. IEEE 978- 1- 4244- 6551-4/10.
- [3] 2003. AN885 - Brushless DC (BLDC) Motor Fundamentals. Microchip Technology Inc.
- [4] R. Akkaya, A.A. Kulaksız, and O Aydogdu, DSP implementation of a PV system with GA -MLP- NN based MPPT controller supplying BLDC motor drive, Energy Conv. and Management 48, 210 - 218, 2007.
- [5]. P. Pillay and R. Krishnan, Modeling, simulation, and analysis of permanent - magnet motor drives, part II: the brushless DC motor drive, IEEE Trans. on Industry Applications 25, 274–279, 1989.
- [6]. P.D. Evans and D. Brown, Simulation of brushless DC drives, Proc. of the IEE 137, 299– 308, 1990.
- [7]. R. Carlson, M. Lajoie -Mazenc, and C.D.S. Fagundes, Analysis of torque ripple due to phase commutation in brushless DC machines, IEEE Trans. on Industry Applications 28, 632–638, 1992.
- [8]. S.K. Safi, P.P. Acarnley, and A.G. Jack, Analysis and simulation of the high -speed torque performance of brushless DC motor drives, Proc. of the IEE 142, 191–200, 1995.
- [9]. J. Figueroa, C. Brocart, J. Cros, and P. Viarouge , Simplified simulation methods for polyphase brushless DC motors, Mathematics and Computers in Simulation 63, 209–224, 2003.
- [10] . C.W. Hung; C.T. Lin, and C.W. Liu, An Efficient Simulation Technique for the Variable Sampling Effect of BLDC Motor Applications, IECON 2007, pp. 1175– 1179, 2007.