

Content Caching and Scheduling in Wireless Networks

*R.JYOTHSNA


**CH.RAVINDER

*M.TECH student, Dept of CSE, VAAGDEVI ENGINEERING COLLEGE

**Assistant Professor, Dept of CSE, VAAGDEVI COLLEGE OF ENGINEERING

Abstract: The rapid change in wireless content access development implies the need for content placement and scheduling at wireless base stations. Elastic traffic is not sensitive to delay. Figuratively speaking, data can be separated within the time. By using TCP protocol we can able to share data like traffic associated with this application. We study a system under which users are divided into clusters based on their channel conditions, and their requests are represented by different queues at logical front ends. Requests might be elastic or inelastic. This in turn implies that future sensor networks will have to cater for a mix of elastic and inelastic traffic. In Wireless sensor networks control protocols are designed in elastic traffic with respective to the current state. A new developed theory of utility proportional rate control for both wired and wireless network we can applicable, we represent a mathematical theoretical framework that gives us fixable elegant queue backpressure-based algorithms. This allows us to design the first ever rate control protocol that can adequate handle a mix of elastic and inelastic traffic in a wireless sensor network. We design a provably optimal policies that stabilize the request queues and reduce average deficit to zero hence ensuring that the quality-of-service (QoS) target is met at small cost. We illustrate our approach through simulations.

Keywords: Content Distribution Network (CDN), Delay-Sensitive Traffic, Prediction, Quality of Service (QoS), Queueing.




1. INTRODUCTION

In the recent times, there has been a considerable rise of smart portable wireless devices as a means of content expenditure. It is likely to benefit from inherent broadcast nature of wireless medium to convince numerous users at the same time. Caching as well as content scheduling problems were earlier considered for online Web caching and for systems of distributed storage [1]. Load balancing as well as placement with linear communication costs were examined and their aim is to use methods of distributed and centralized integer programming to reduce the costs. In our work we does not consider for network capacity constraints, delay-sensitive traffic, or else wireless aspects. The techniques that we will make use of are on the basis of scheduling schemes but these do not suppose content distribution by its attendant question of content placement. In our work we are involved in solving joint content placement as well as scheduling problem for elastic and inelastic traffic within wireless networks. Moreover the value of predicting demand for several types of content was

determined and the impact it has on got on designing of caching algorithms [2][3]. Here we build up algorithms in support of content distribution by means of elastic and inelastic requests. We make use of a request queue to completely determine recognition of elastic content. Deficit queue find out the required service for inelastic requests.

2. DISTRIBUTION OF CONTENT IN WIRELESS SYSTEMS

While there has been important work on algorithms of content caching, there is much less on interaction of caching as well as networks. Users can build two kinds of requests, that is: elastic requests that contain no delay constraints, and inelastic requests that contain an inflexible delay constraint. In a request queue, elastic queries are stored at each front end, by a request engaging a particular queue and its objective is to balance the queue, in an attempt to enclose finite delays. Intended for inelastic requests, we adopt a model in which users request content chunks that include a strict deadline, and request is dropped if deadline cannot be



met. The proposal here is to fulfil a convinced target delivery ratio. Each time when an inelastic request is dropped, restructuring of a deficit by a quantity that is proportional to delivery ratio. Converting caching and load balancing difficulty into one of queuing and scheduling is thus interesting. We consider a system in which both inelastic as well as elastic requests cooccur. Our purpose was to improve system regarding finite queue lengths in support of elastic traffic and zero average deficit value in favour of inelastic traffic. A natural location towards placing caches intended for a content distribution network would be at wireless gateway, which may possibly be a cellular base station by which users get hold of network access.

A notion of Wireless content distribution was shown in fig1 in which there are numerous cellular base stations each of which encompass a cache for storing of content. The cache content might be regularly refreshed all the way through accessing a media vault. Users were divided into several clusters, and users in each cluster are geographically in close proximity

such that they contain statistically comparable channel conditions and are capable to access similar base stations [4]. Numerous clusters may possibly be present in the similar cell based on difference of their channel conditions to various base stations. The requests that are made by each group are collected at a logical entity termed as front end that is associated with that cluster. The front end might be running on any of the devices within cluster or at base station, and its function is to continue path of requests that are connected with users of that group. The restrictions that have an effect on system operation are wireless network among caches to users containing fixed capacity; each cache hosting only a fixed amount of content; refreshing content in caches from media vault incurring a cost [5]. The base stations make use of numerous access schemes and consequently each base station can maintain multiple instantaneous unicast transmissions, in addition to a single broadcast transmission. It is moreover likely to learn other scenarios by means of our framework.

III. MANAGING OFCONTENT DISTRIBUTION BY ELASTIC AND INELASTIC REQUESTS:

Generally there are two types of users such as inelastic and elastic on the basis of requests that they build. The methods that we will make use of are on the basis of scheduling schemes but these do not suppose content distribution by its attendant question of content placement. Requests that are made by inelastic users have to be fulfilled within frame in which they were made. Elastic users do not contain permanent deadline, and these users appear, make a request, are served, and leave. Content is usually partitioned into two disjoint sets of inelastic as well as elastic content. The proposal is that an inelastic request has to moreover be satisfied by end of frame. Inelastic requests are provided by means of broadcast transmissions. To make available sufficient service towards each user, we need to come to a decision on a least amount delivery ratio for inelastic users. In unicast elastic situation we assume there are just requests for elastic content which are served by means of unicast communications. Transmissions in the

system are assumed to be among base stations as well as frontends, rather than to actual users making the requests. Capacity region is the set of all possible requests. In this model, front ends have independent as well as separate channels towards caches. These diverge from earlier studied wired caching systems since wireless channels are not forever ON.

Hence placement and scheduling have to be accurately coordinated consistent with channel states. In joint scenario of elastic-inelastic we study case where elastic as well as inelastic requests co-occur within the system. Elastic requests are believed to be provided through unicast communications among the caches and front ends, whereas base stations broadcast inelastic contents in the direction of inelastic users. Servers were assumed to employ OFDMA technique to convey above their single broadcast as well as numerous unicast channels. Even though this traffic do not share access medium, the entire content have to share common space in caches. Thus, we necessitate an algorithm that mutually solves elastic as well as inelastic scheduling problems. In inelastic

caching with content expiry an inelastic caching difficulty where contents expire after some time was considered [6]. This novel representation is well-suited with instantaneous streaming of live events; we consider inelastic traffic and suppose that lifetime of an inelastic content is equivalent to length of a frame consequently; we can cache a content just for duration of a frame following which the content will not be functional any more.

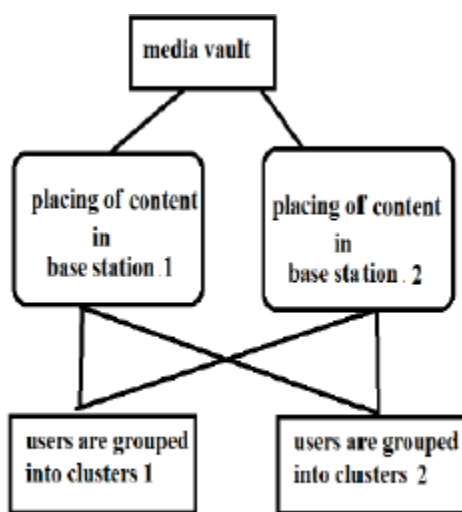


Fig1. An Overview of distribution of Wireless Content.

IV. CONCLUSION

Normally there are two types of users such as inelastic and elastic on the basis of requests that they build. Elastic requests that contain no delay constraints, and inelastic

requests that contain an inflexible delay constraint. We are concerned in solving joint content placement as well as scheduling problem in our work for elastic and inelastic traffic within wireless networks. In our work we build up algorithms in support of content distribution by means of elastic and inelastic requests. We suppose a system in which both inelastic as well as elastic requests cooccur. Our rationale was to get better system regarding finite queue lengths in support of elastic traffic and zero average deficit value in favour of inelastic traffic.

The techniques that we will exploit are on the basis of scheduling schemes but these do not suppose content distribution by its attendant question of content placement. In the situation of unicast elastic we assume there are just requests for elastic content which are served by means of unicast communications. In joint situation of elastic inelastic we study case where elastic as well as inelastic requests co-occur within the system. In inelastic caching by means of content expiry an inelastic caching difficulty where contents expire after some time was considered. This new illustration is well suited with instantaneous streaming of live

events; we consider inelastic traffic and suppose that lifetime of an inelastic content is equivalent to length of a frame.

V. REFERENCES

- [1] A. Stolyar, “Maximizing queueing network utility subject to stability: Greedy primal-dual algorithm,” *Queueing Syst. Theory Appl.*, vol. 50, no. 4, pp. 401–457, 2005.
- [2] A. Eryilmaz and R. Srikant, “Joint congestion control, routing, and MAC for stability and fairness in wireless networks,” *IEEE J. Sel. Areas Commun.*, vol. 24, no. 8, pp. 1514–1524, Aug. 2006.
- [3] J. Jaramillo and R. Srikant, “Optimal scheduling for fair resource allocation in ad hoc networks with elastic and inelastic traffic,” in *Proc. IEEE INFOCOM*, San Diego, CA, USA, Mar. 2010, pp. 1–9.
- [4] K. Psounis and B. Prabhakar, “Efficient randomized Web-cache replacement schemes using samples from past eviction times,” *IEEE/ACM Trans. Netw.*, vol. 10, no. 4, pp. 441–455, Aug. 2002.
- [5] N. Laoutaris, O.T. Orestis, V. Zissimopoulos, and I. Stavrakakis, “Distributed selfish replication,” *IEEE Trans. Parallel Distrib. Syst.*, vol. 17, no. 12, pp. 1401–1413, Dec. 2006.
- [6] S. Borst, V. Gupta, and A. Walid, “Distributed caching algorithms for content distribution networks,” in *Proc. IEEE INFOCOM*, San Diego, CA, USA, Mar. 2010, pp. 1–9.

AUTHOR 1 :-

* R.Jyothsna completed her B tech in Ramappa Engineering College in 2013 and pursuing M-Tech in Vaagdevi Engineering College

AUTHOR 2:-

**Ch.Ravinder is working as Assistant Professor in Dept of CSE, Vaagdevi College of Engineering