



International Journal for Innovative Engineering and Management Research

A Peer Reviewed Open Access International Journal

www.ijiemr.org

COPY RIGHT



ELSEVIER
SSRN

2022IJIEMR. Personal use of this material is permitted. Permission from IJIEMR must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works. No Reprint should be done to this paper, all copy right is authenticated to Paper Authors

IJIEMR Transactions, online available on 06th Dec 2022. Link

[:http://www.ijiemr.org/downloads.php?vol=Volume-11&issue=ISSUE-12](http://www.ijiemr.org/downloads.php?vol=Volume-11&issue=ISSUE-12)

DOI: 10.48047/IJIEMR/V11/ISSUE 12/51

Title **REAL-TIME GENDER RECOGNITION USING FACE FEATURE EXTRACTION MODELS**

Volume 11, Issue 12, Pages: 388-397

Paper Authors

Dr.K VIJAYA BHASKAR , M VENKATA RAMANA , Y HARIKA



USE THIS BARCODE TO ACCESS YOUR ONLINE PAPER

To Secure Your Paper As Per **UGC Guidelines** We Are Providing A Electronic Bar Code

REAL-TIME GENDER RECOGNITION USING FACE FEATURE EXTRACTION MODELS

Dr.K VIJAYA BHASKAR ¹, M VENKATA RAMANA ², Y HARIKA ³

Associate professor ¹, Assistant Professor ², Assistant Professor ³

CSE Department, Sri Mittapalli College of Engineering, Guntur, Andhra Pradesh-522233

ABSTRACT—The identification of human beings based on their biometric body parts, such as face, fingerprint, gait, iris, and voice, plays an important role in electronic applications and has become a popular area of research in image processing. It is also one of the most successful applications of computer–human interaction and understanding. Out of all the above mentioned body parts, the face is one of most popular traits because of its unique features. In fact, individuals can process a face in a variety of ways to classify it by its identity, along with a number of other characteristics, such as gender, ethnicity, and age. Specifically, recognizing human gender is important because people respond differently according to gender. In this paper, we present a robust method that uses global geometry-based features to classify gender and identify age and human beings from video sequences. The features are extracted based on face detection using skin color segmentation and the computed geometric features of the face ellipse region. These geometric features are then used to form the face vector trajectories, which are inputted to a time delay neural network and are trained using the Broyden–Fletcher–Goldfarb–Shanno (BFGS) function. Results show that using the suggested method with our own dataset under an unconstrained condition achieves a 100% classification rate in the training set for all application, as well as 91.2% for gender classification, 88% for age identification, and 83% for human identification in the testing set. In addition, the proposed method establishes the real-time system to be used in three applications with a simple computation for feature extraction.

Keywords—Biometrics; Face Detection; Geometry-based; Gender Classification; Quasi-Newton Algorithms

1. INTRODUCTION

Automatic analysis of video data is a very challenging problem. To find a particular

object in a video stream and automatically decide if it belongs to a particular class, one should utilize a number of different

machine learning techniques and algorithms, as well as solve object detection, tracking, and recognition tasks [12]. Automatic human recognition tasks based on pattern recognition and artificial intelligence (AI) use different biometric body parts, such as face, fingerprint, gait, iris, and voice. Of all these body parts, the face is one of the most popular traits because of its unique features and impression [9]. Identity verification using face recognition can be performed without the cooperation and knowledge of the person being identified. However, recognizing a person becomes difficult because of the variations in pose, illumination, occlusion, expression, and so forth. [9]. Human identification using the face is critical because it considers multiple parts of the facial structure, and the face of a person changes with the passage of time. In fact, individuals can process a face in a variety of ways to categorize it by its identity, along with a number of other demographic characteristics, such as gender, ethnicity, and age. In particular, recognizing human gender is important because people respond differently depending to on gender. In sum, a successful gender classification approach can boost the performance of many other applications, including person recognition and smart

human–computer interfaces [20]. Face detection is critical to the final result in several applications, such as face processing (i.e., face, expression, gender classification, and gesture recognition), computer–human interaction, human crowd surveillance, biometrics, video surveillance, AI, and content-based image retrieval. It can be viewed as a preprocessing step for obtaining the object region [7] [12] [20] [21]. Recent research carried out face detection by using a colorbased algorithm where the segmentation of skin-colored regions becomes robust only when a proper color model is chosen. Several color models exist RGB, YCbCr, and HSV color models, and each has a specific work field and strength [7]. The RGB color space consists of the three additive primaries: red, green, and blue. The RGB model simplifies the design of computer graphics systems but is not ideal for all applications. The YCbCr color space was defined in response to increasing demands for digital algorithms in handling video information and has since become a widely used model in digital videos. Given that hue, saturation, and intensity value are properties used to describe color, a corresponding color model, HSV, logically exists. When using the HSV color space, knowing what percentage of blue or green

is required to produce a color is unnecessary; the hue is adjusted to get the desired color [7].

2. PREVIOUS STUDIES

The present study proposes a short review of the latest methods used in gender classification. In facial feature extraction, various methods apply to extract the features from image or video sequences: geometry-based, template-based, color-based segmentation, and appearance-based methods [6] [21] [22]. The geometry-based method extracts features using geometric information, such as the relative positions and sizes of the facial components. This method, however, requires the classifier to use a large number of features. The techniques proposed in [6] extract geometric features, such as left eye width, right eye width, nose width, left eye center to mouth left corner, right eye center to mouth right corner, left eye center to mouth right corner, and right eye center to mouth left corner, mouth left corner to middle of chin, and mouth right corner to middle of chin. [17] proposed using geometric features, such as the distance between eyebrows to an eye, eyebrow to nose top, nose top to mouth, eye to mouth, left eye to right eye, nose width, and mouth width, all of which are extracted using the Viola–Jones algorithm. [1] [8]

[15] applied a combination of global and grid features. Global features include interocular distance, the distance between the lips to the nose tip, the distance between the nose tip to the line joining the two eyes, the distance between lips to the line joining the two eyes, eccentricity of the face, ratio of dimension, and width of the lips. Grid features include skin color, moustache region, lip region, eye tail, forehead, eyelid, and nose wing of the face image. The template-based approach matches facial components to previously designed templates using an appropriate energy functional. The best match of a template in the facial image will yield the minimum energy; this approach can be too complex due to the extensive computation involved and is only effective when query and model images have the same scale, orientation, and illumination properties. Color-segmentation makes use of skin color to isolate the face and any non-skin color region. In this approach, the quality of the image coupled with illumination and hue plays an important role in image recognition and rate of classification. For a complicated background, [18] based their face detection method on the skin color feature. The features in the appearance-based method differs from the simple facial features, such as eyes and mouth, used in other approaches. Any extracted

characteristic of the image refers to a feature. In methods such as principal component analysis (PCA), which was proposed by [5] [14] [19] [21] [24] [27], a face image is represented as a two-dimensional N by N array of intensity values or a vector of dimension N^2 . Then PCA finds an M -dimensional subspace whose basis vectors correspond to the maximum variance direction in the original image space. New basis vectors define a subspace of face images called face space. All images of known faces are projected onto the face space to find sets of weights that describe the contribute of each vector. The face can be identified through a comparison of a set of weights for the unknown face and the sets of weights of known faces. [12] applied an adaptive feature generation algorithm trained by means of the optimization procedure according to the LDA principle. Gabor wavelets were also used to extract the feature vector. These approaches are commonly used for facial recognition rather than person identification. [3] [24] applied Gabor filters at five scales and eight orientations for detecting skin regions. In [13], a Fourier–Gabor filter was applied to extract features from the face images. A different size, orientation, and scale values were adopted. Regardless of the above mentioned methods, a variety of

classification techniques can be used for recognition, such as decision trees, neural networks, nearest neighbors classifier (NNC), support vector machines (SVMs), Bayesian networks, fuzzy logic, and genetic algorithms, among many others. [11] trained and tested three classifiers SVM, back propagation NNs (BPNNs), and KNN. These classifiers are then optimized through the GA; using this approach; they got promising results in terms of the classification error rate and the minimization of computation time. [6] proposed a variant of the decision tree algorithm for gender classification of frontal images owing to its distinctive features. Their technique showed robustness and relative scale invariance for gender classification. [22] got high accuracy by using SVMs for gender classification. [3] [21] [26] produced very promising recognition rates for three applications face recognition, facial expression recognition, and gender classification, and reasonable results in all databases with the same set of features and (NNC) classifiers. The system also had real-time capability and was automatic. [23] used an unsupervised learning technique to classify DCT-based feature vectors into groups and identify if the subject in the input image was —present or —not present in the image database.

After training for approximately 850 epochs, the system achieved a recognition rate of 81.36% for 10 consecutive trials. The main advantage of this technique is its high-speed processing capability and low computational requirements in terms of speed and memory utilization. In [14], PCA matrixes with different numbers of components (40, 50, and 60) were passed to the NN, which conducted the framework with a different layer number, different learning algorithms, and a different number of neurons in each layer, and achieved a high correct classification rate of approximately 83.5%. [8] used posterioriclass probability and Aartificial Neural Network to classify gender and age, respectively. The results achieved were 100% for face recognition, 98% for gender classification, and 94% for age classification. In [18], the recognition step was applied by SVM. A good performance of the gender classification test was also achieved on a relatively large-scale and low-resolution video database. [17] applied the Artificial Neural Network for face, facial expression, and gender classification, and produced reasonable results in all databases. [12] proposed using SVM and presented the experimental results gained on a large image dataset. More than 90% accuracy of the viewer's gender recognition was achieved. The

myth of a successful real-time gender classification depends greatly on the right choice of features and classification method. In this paper, an algorithm is introduced to enhance real-time gender classification. The face region is detected using skin color segmentation with HSV color space, and the features are extracted using global geometric properties. A Time Delay Neural Network (TDNN) algorithm is used for classification tasks. The suggested method is implemented by using our own datasets.

3. PROPOSED METHODOLOGY

The steps of the proposed method can be summarized as follows:

- 1) Extract video frames.
- 2) Delete abnormal images from the start and the end manually.
- 3) Detect the face region from each frame using skin color segmentation.
- 4) Extract features from each image using the geometrybased approach.
- 5) Classify gender using dynamic neural networks.

Face detection With our method, a dependable result can be achieved for video face segmentation based on skin color. The quality of face detection is critical to the final result of the whole

system as an imprecise determination of face position can lead to wrong decisions at the recognition step [12]. Each video sample is taken from our own database. The segmentation of skin-colored regions becomes robust only by choosing proper color model. Numerous applications use the HSV color model. Machine vision uses HSV color space to identify the color of different objects. Image processing applications, such as histogram operations, intensity transformations, and convolutions operate only on an intensity image. These operations are performed with much ease on an image in the HSV color space [2] [7] [12]. We applied skin color segmentation with the HSV color model to separate all skin color pixels in connecting components that use an adaptive Gaussian mixture model (GMM) proposed by [10]. The adaptive GMM can adapt the model parameters to cope with changing imaging conditions, such as lighting and noise. The segmentation method detected the ellipse that represents the skin region, both original and skin image, as shown respectively in Figure. 1(a) and (b).



Fig. 1. (a) Initial Image (b) Extracted Region

Feature Extraction Geometric-based features are extracted using ellipse mathematical definition and properties [28]. Global features are calculated for a video sequence frame from the ellipse for the face region, horizontal center (X_0), and vertical center (Y_0) of the detected face, where a and b are the semi-major and semiminor axes (half of the major and minor axes of the ellipse) respectively. The area enclosed by an ellipse area is shown as Equation (4). The two foci (the term —focal points are also used) of an ellipse are two special points F_1 and F_2 on the ellipse's major axis and are equidistant from the center point. The sum of the distances from any point P on the ellipse to those two foci is constant and equal to the major axis ($PF_1 + PF_2 = 2a$), denoted.

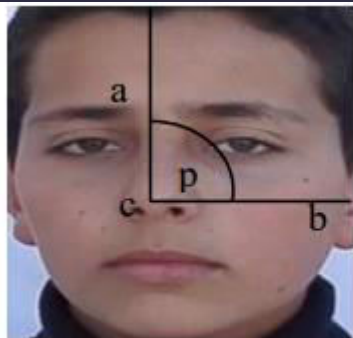


Fig. 2. Geometry of the Face Region

Classification Method Finally, a TDNN is used for gender classification. The TDNN is a well-known classifier that is very successful in classifying spatio-temporal patterns as described in details in my previous research [16] and is thus used in this research. The architectural characteristics of the TDNN have an additional feature, known as a tapped delay line in its input neuron [12]. In the present research, the delays are: in the input layer, $d1 = 0:3$; in two hidden layers, $d2 = 0:3$ and $d3 = 0:5$; and in the output layer, $d4 = 0:5$. Training and testing require a sufficient number of video databases. There are many commonly used databases for the tasks of human face recognition such as Multi-PIE database, the FERET database, and SCface, but they do not contain a sufficient number of videos of different individuals and are inadequate for our applications. We collected our own database. Table 1 describes the frame parameters.

4. EXPERIMENTAL RESULTS

To evaluate the performance of the gender classification algorithm, we prepared our own video sample for the subject. Figure 3 shows sample face sequences from the dataset. TDNN with conjugate gradient algorithms, BFGS quasi-Newton backpropagation (trainbfg) training function in our experiments, The figure also shows the performance result of the human identification and gender and age classification system.

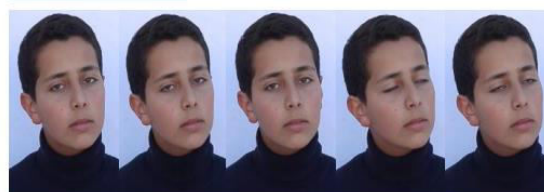


Fig. 3. Face Sequences from the Dataset

The frames that did not display a face part from the samples were eliminated. The feature vector of all frames form an input vector that trains the TDNN, which takes 70% of the samples for training and 30% for testing of all persons. During this research, the TDNN architecture was applied as shown in Figure. 4. Based on previous research [16], the sigma mode function —tansigl is used in the input and hidden layers, whereas the linear transfer function pure linear —purelinl is used in the output layer. We created 4 layers of TDNN with 5 input neurons and 20 hidden

neurons, with the delay of 0–3 for the first two layers and 0–5 for another layer.

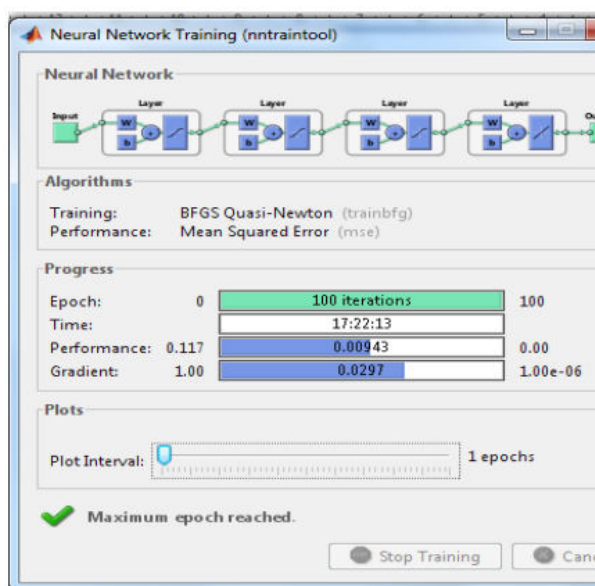


Fig. 4. TDNN Architecture

5. CONCLUSION AND FUTURE WORK

A real-time classification system using TDNN is described according to BFGS training algorithms and used for gender and age classification and human identification. The developed system implies that we can classify gender, age, and human being with promising recognition rate by using global geometric features from video. The developed method based on global geometric facial features achieves a high classification rate of 100% in the training set for all application, as well as 91.2% for gender classification, 88% for age classification, and 83% for human identification in the testing set. Future work will be devoted to

implementing and examining the other features extracted from face parts by various techniques with real-time application.

REFERENCES

- [1] Alok Verma, S Achyut Rajy, Abhishek Midyaz, Jayasree Chakraborty,(2014). Face Detection using Skin Color Modeling and Geometric Feature. Conference: 2014 International Conference on Informatics, Electronics & Vision (ICI)). Dhaka: IEEE, 2, 14,Pp. 1-6.
<http://dx.doi.org/10.1109/ICIEV.2014.6850755>
- [2] Erno Mäkinen , Roope Raisamo. (2008). an Experimental Comparison of Gender Classification Methods. Pattern Recognition Letters , 1544–1556.
<http://dx.doi.org/10.1016/j.patrec.2008.03.016>
- [3] Md. Hafizur Rahman, Suman Chowdhury, Md. Abul Bashar. (2013). an Automatic Face Detection and Gender Classification from Color Images using Support Vector Machine. Journal of Emerging Trends in Computing and Information Sciences , 5-11.
- [4] Meltem Demirkus, Matthew Toews, James J. Clark, Tal Arbel. (2010). Gender Classification from Unconstrained Video

Sequences. IEEE, 55- 62.

<http://dx.doi.org/10.1109/cvprw.2010.5543829>

[5] Ms. Rutuja G. Shelke, Prof. S. A. Annadate. (2014). Face Recognition and Gender Classification using Features of Lips. International Journal of Innovation and Scientific Research, 337-341.

[6] Muhammad Naeem Ahmed Khan, Sheraz Ahmed Qureshi and Naveed Riaz. (2013). Gender Classification With Decision Tree. International Journal of Signal Processing, Image Processing and Pattern Recognition , 165-176.

[7]. G. Jagga Rao, Y. Chalapathi Rao, Dr. Anupama Desh Pande "Detection For 6G-NOMA Based Machine Learning Optimization for Successive Adaptive Matching Pursuit Analysis", Q3, pp. 1803-1812, Jan 2020.

[8]. Sudha, Y. Chalapathi Rao, G. Jagga Rao " Machine Learning based Copy-Move Forgery Detection with Forensic Psychology Ultra-Hd images "in Volume 81, Nov-Dec-2019.

[9]. Dr. B Sankara Babu, Srikanth Bethu, K. Saikumar, G. Jagga Rao, "Multispectral

[15] Akshay Kajekar, Shreyash Patel, Sweta Chauhan, Prashasti Kanikar. (2012).

Satellite Image Compression Using Random Forest Optimization Techniques" Journal of Xidian University, in Volume 14, Issue 5-2020.

[10]. G. Jagga Rao, Y. Chalapathi Rao, "Human Body Parts Extraction in Images Using JAG-Human Body Detection (JAG-HBD) Algorithm Through MATLAB" Alochana Chakra Journal, Volume IX, Issue V, May/2020.

[11]. Dr. k. Raju, A. Sampath Dakshina Murthy, Dr. B. Chinna Rao, G. Jagga Rao "A Robust and Accurate Video Watermarking System Based On SVD Hybridation For Performance Assessment" International Journal of Engineering Trends and Technology (IJETT) – Volume 68 Issue 7 - July 2020.

[12]. G. Jagga Rao, Y. Chalapathi Rao, Dr. Anupama Desh Pande "A Study of Future Wireless Communication: 6G Technology Era " volume 14, issue 11,2020.

[13]. G. Jagga Rao, Y. Chalapathi Rao, Dr. Anupama Desh Pande "Deep Learning and AI-Based millimeter Wave Beamforming Selection for 6G With Sub-6 GHz Channel Information" Volume 21 : Issue 11 – 2020.

Blending of Face Segments. International Journal of Computer Science and Information Technologies, 3929-3933.

[16] AL Mashagba, E. F. (2015). Human Identification by Gait Using Time Delay Neural Networks. Computer and Information Science, 56-63.
<http://dx.doi.org/10.5539/cis.v8n4p56>

[17] Anushri Jaswante. Asif Ullah Khan. Bhupesh Gour. (2013). Gender Classification Technique Based on Facial Features using Neural Network. International Journal of Computer Science and Information Technologies, 839-843.

[18] Chuanxu, W. (2011). Face Segmentation Based on Skin Color in Complicated Background and its Sex Recognition. Journal of Software, 1209-1216.

[19] Dewi Agushinta R., Adang Suhendra, Sarifuddin Madenda, Suryadi H.S. (2010). Face Component Extraction using Segmentation Method on Face Recognition System. Journal of Emerging Trend in Computing and Information Sciences, 67-72.

[20] Federico Matta, Usman Saeed, Caroline Mallauran and Jean-Luc Dugelay, (2008) Facial Gender Recognition using Multiple Sources of Visual Information. Multimedia Signal Processing, 2008 IEEE 10th Workshop On, Cairns, Qld: IEEE, 2008, Pp. 785-790.
<http://dx.doi.org/10.1109/MMSP.2008.4665181>.